



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Input 1 (VGA)	Menu	Audio Mute On
Power Off	Input 1 ((Scart)	Menu Off	Audio Mute Off
Volume Up	Input 1 (DVI)	Adj Up	Video Mute On
Volume Down	Input 1 (HDCP)	Adj Down	Video Mute Off
Auto Image	Input 1 (Component)	Adj Left	Freeze On
Digital Zoom On	Input 2 (RGB)	Adj Right	Freeze Off
Digital Zoom Off	Input 2 (YPbPr)	Enter	
	Input 2 (Video)		
	Input 3 (Video)		
	Input 3 (S-Video)		

3. Other Driver Features

Default Power Status Feedback: RS-232 Polling
Projector Restart Lockout Timer (Default): 100 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male 8-pin mini-DIN connector as follows:

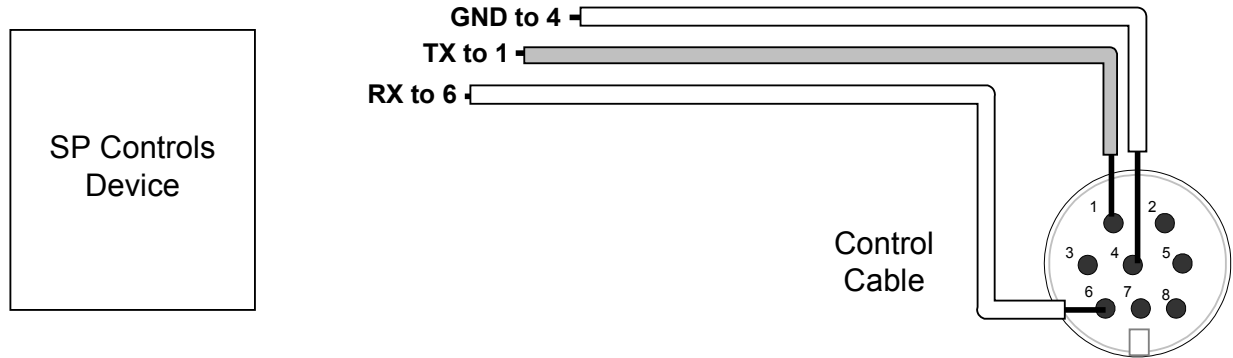

Connect male mini-DIN to projector port labeled *Control Port*.
Serial Adapters (for NRC only): n/a