



## I. Driver Features

### 1. Command Format

This device is controlled through RS-232.

### 2. RS-232 Commands


Power On	Source: Video	Mute On
Power Off	Source: S-Video	Mute Off
Volume (level)	Source: VGA 1	Freeze
	Source: VGA 1 – Component	Unfreeze
	Source: VGA 2	Zoom Up
	Source: VGA 2 - SCART	Zoom Down
	Source: VGA 2 – Component	
	Source: HDMI	

### 3. Other Driver Features

Default Power Status Feedback: RS-232 Polling  
Projector Restart Lockout Timer (Default): 120 Seconds

## II. RS-232 Control Wiring

Wire RS-232 control to a female DB9 as follows:

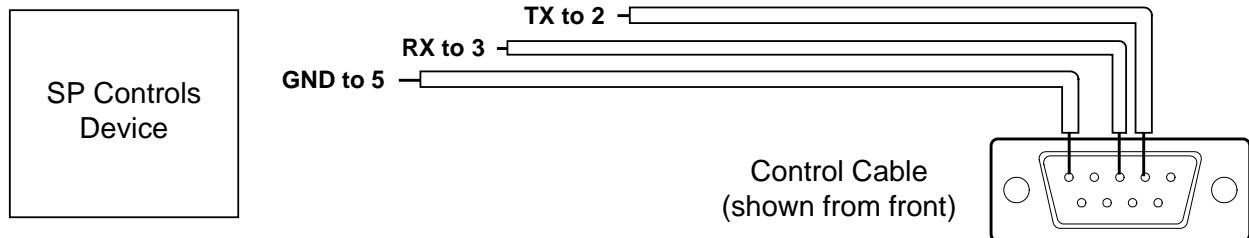

Serial Adapters (for NRC only): None

## III. Projector Information

**Attention:** Optoma's *SOURCE LOCK* feature must be enabled or the control system will not be able to control input selection. In the projector *OPTIONS* menu, select *SOURCE LOCK* and set to ON.