



I. Driver Features

1. Command Format

This device is controlled through RS-232 and IR.

2. RS-232 Commands

RS-232 Commands			IR Commands	
Power On	Source: Video	Menu	Freeze On	Aspect
Power Off	Source: S-Video	Enter	Freeze Off	
Volume (level)	Source: RGB 1	Adj Up	Digital Zoom Up	
Mute Off	Source: RGB 2	Adj Down	Digital Zoom Down	
	Source: DVI	Adj Left		
		Adj Right		


3. Other Driver Features

Default Power Status Feedback: RS-232 Polling

Projector Restart Lockout Timer (Default): 67 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a male DB9 as follows:

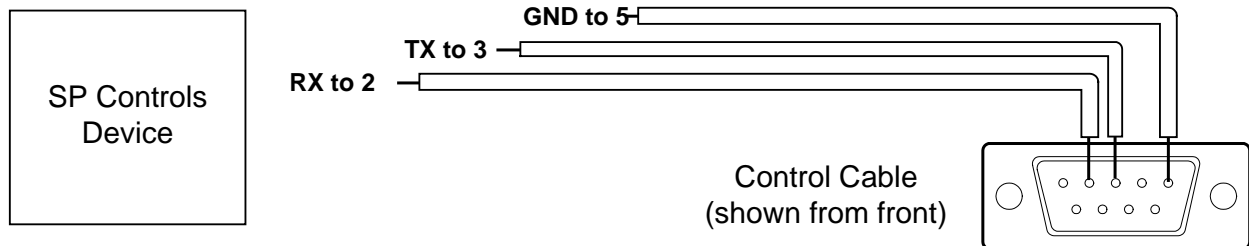

Connect male DB9 to projector port labeled *Serial In*.
Serial Adapters (for NRC only): None