



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands

Power On	Source: S-Video	Menu	AV Mute
Power Off	Source: S-Video (CC on)	Adj Up	E-Zoom Up
Volume (absolute)	Source: S-Video (CC off)	Adj Down	E-Zoom Down
Source: Video	Source: Comp Vid 1	Adj Left	Freeze
Source: Video (CC on)	Source: Comp Vid 2	Adj Right	Help
Source: Video (CC off)	Source: PC 1	Enter	
	Source: PC 2	Escape	


3. Other Driver Features

Default Power Status Feedback: RS-232 Polling

Projector Restart Lockout Timer (Default): 30 Seconds

II. RS-232 Control Wiring

Wire RS-232 control to a female DB9 as follows:

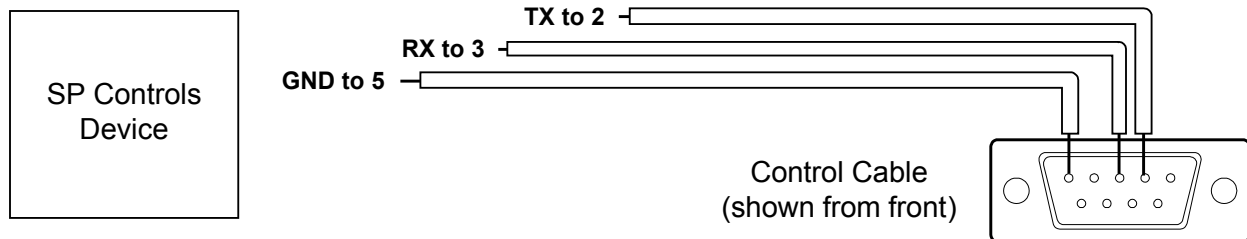

Connect female DB9 to projector port labeled *RS-232C*.

Serial Adapters (for NRC only): None