



I. Driver Features

1. Command Format

This device is controlled through RS-232.

2. RS-232 Commands


Power On	Source: Video	Menu	Freeze
Power Off	Source: S-Video	Adj Up	Enlarge
Volume Up	Source: YCbCr	Adj Down	Resize
Volume Down	Source: VGA 1	Adj Left	Zoom
Mute	Source: VGA 2	Adj Right	Focus
Auto image		Enter	Blank

3. Other Driver Features

Default Power Status Feedback: None
Projector Restart Lockout Timer (Default): 80 Seconds

II. RS-232 Control Wiring (requires Lumens adapter cable, sold separately)


Wire RS-232 control to a male DB9 as follows:

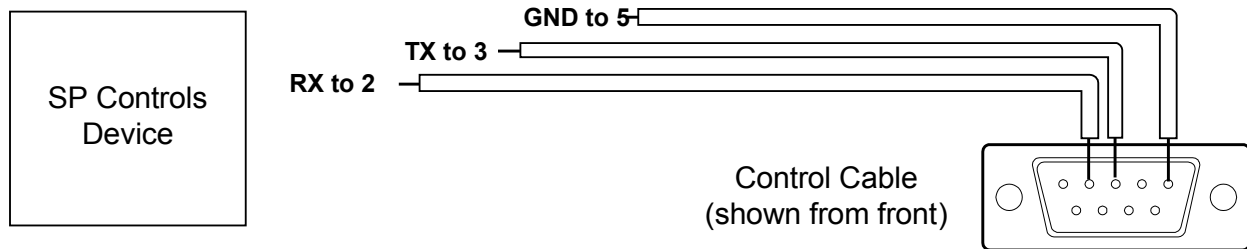

Connect male DB9 to the Lumens custom mini-DIN adapter cable (must be separately ordered from Lumens). Connect adapter cable to the projector port labeled *PC Control 1*.
Serial Adapters (for NRC only): A and B

Alternate Wiring (direct 8-pin mini-DIN termination)

Wire RS-232 control to a male 8-pin mini-DIN as follows:

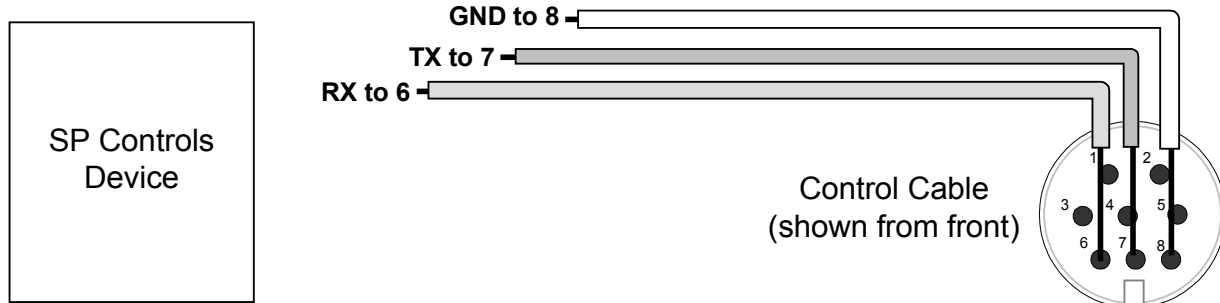

Connect male 8-pin mini-DIN to projector port labeled *PC Control 1*.
Serial Adapters (for NRC only): None